



Image 1: wiring harness CB1000

- Flexible wires
- DIN 72551-6 wires

General

CB1000 wiring harness must be used as a basis for the inputs expander electrical installation.

Technical Specifications

Electrical characteristics

Automotive standard wires DIN 72551-6. Up to 150°C resistant and 300 V isolated.

12 V Supply

Mechanical characteristics

MIKE connectors

Length: 2,5 m

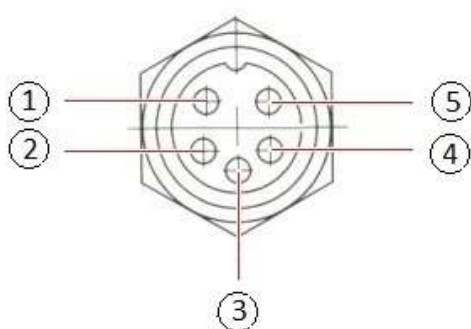


Image 2: MIKE 5-way connector

Pino	Função
1	GND
2	12V
3	N/C
4	Rx
5	Tx

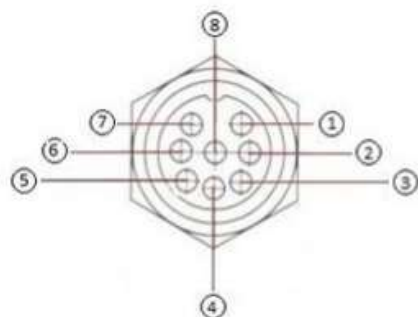


Image 3: MIKE 8-way connector female

Function	Pin
IN_1	1
IN_2	2
IN_3	3
IN_4	4
IN_5	5
12V_SWITCH	6
SEN_5V	7
PWR_GND	8

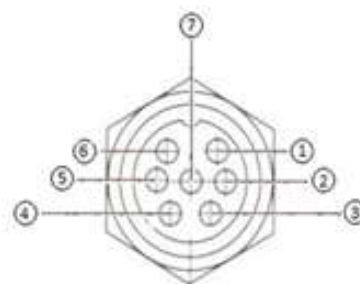


Image 4: MIKE 7-way connector female

Function	Pin
DIG_1	1
DIG_2	2
DIG_3	3
DIG_4	4
DIG_5(RPM)	5
SEN_5V	6
PWR_GND	7