



Image 1: wiring harness IDM6

- Waterproof Connector
- Flexible wires
- DIN 72551-6 wires

## General

IDM6 wiring harness must be used as a basis for the ignition driver electrical installation.

## Technical Specifications

### Electrical characteristics

Automotive standard wires DIN 72551-6. Up to 150°C resistant and 300 V isolated.

1mm wire – 12 A capable

0,5mm wire – 9A capable

### Mechanical characteristics

Superseal connector

Length: 2,5 m

Waterproof connector

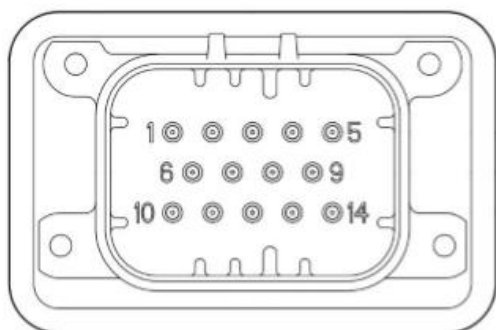


Image 2: Superseal connector

| Function | Pin |
|----------|-----|
| IN_1     | 2   |
| IN_2     | 7   |
| IN_3     | 11  |
| IN_4     | 4   |
| IN_5     | 8   |
| IN_6     | 13  |
| GND      | 3   |

| Function | Pin |
|----------|-----|
| OUT_1    | 1   |
| OUT_2    | 6   |
| OUT_3    | 10  |
| OUT_4    | 5   |
| OUT_5    | 9   |
| OUT_6    | 14  |
| GND      | 12  |