



Image 1: wiring harness PSW10

- Waterproof Connector
- Flexible wires
- DIN 72551-6 wires

General

PSW10 wiring harness must be used as a basis for the power driver electrical installation.

Technical Specifications

Electrical characteristics

Automotive standard wires DIN 72551-6. Up to 150°C resistant and 300 V isolated.

1mm wire – 12 A capable

0,5mm wire – 9A capable

Mechanical characteristics

Superseal connectors

Length: 2,5 m

Waterproof connector

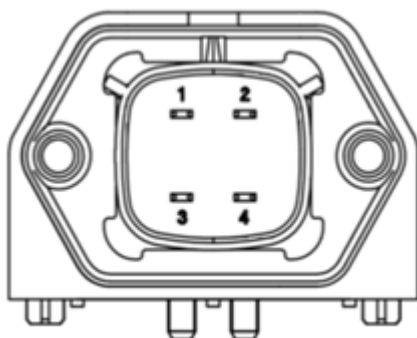


Image 2: 4-way Superseal connector

Pin	Function
1	12V
2	12V
3	12V
4	GND

Wiring Harness PSW10

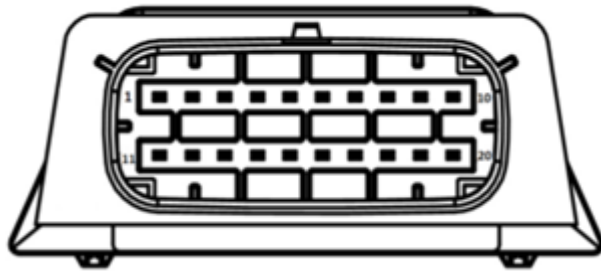
www.protuneelectronics.com.br

Image 3: 20-way Superseal connector

Pin	Function
1	OUT_1
2	OUT_2
3	OUT_3
4	OUT_4
5	OUT_5
6	OUT_6
7	OUT_7
8	OUT_8
9	OUT_9
10	OUT_10
11	IN_1
12	IN_2
13	IN_3
14	IN_4
15	IN_5
16	IN_6
17	IN_7
18	IN_8
19	IN_9
20	IN_10